

EL[®]MARK

The Brand of Electricity

ONE CHANNEL FOUR ZONES REMOTE




Specifications:

- Output signal: RF(2.4G)
- Battery capacity: 2xAAA
- Working current: <20mA
- Standby current: < 20 μ A
- Remote distance: 30m
- Working temperature: -30°C~55°C
- IP rating: IP20

Features:

- To control one color
- Removeable and stick anywhere easily
- With on/off state and touch operation indication
- Can remote control multiple controllers or lamps
- High precision touch chip with high sensitive & high stability touch control
- Free installation, no wiring, removable.

Dimensions:

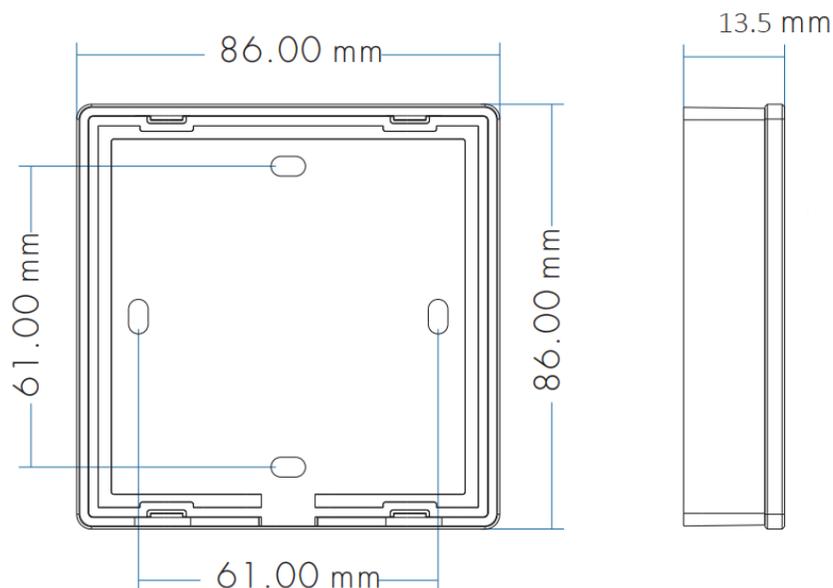

Match Remote Control:

Use the controller's Match key

Match: Short press match key immediately press Zone key of the touch panel.

Delete: Switch off the power of the receiver, then switch on power again, immediately short press Zone key 5 times on the touch panel. The light blinks 5 times means all matched remotes were deleted.

Use Power Restart

Match: Switch off the power of the receiver, then switch on power again, immediately short press Zone key 3 times on the touch panel. The light blinks 3 times means match is successful.

Delete: Press and hold match key for 5s to delete all match, the light blinks 5 times means all matched remotes were deleted.

Basic data:

Catalogue number	Output signal	Battery capacity	Working current	Standby current	Packing /Box (pcs)
99TOUCHB1	RF(2.4G)	2xAAA	<20mA	< 20µA	1/200

Key functions:


 — Turn on/off all zone light.

 — Brightness slide.

   — Short press recall scene, long press 2s to save the current state into 1/2/3.

Short press turn on zone light and select zone simultaneously, long press 2s turn off zone light. 4 zone control separately or synchronously, each zone could control multiple receivers.

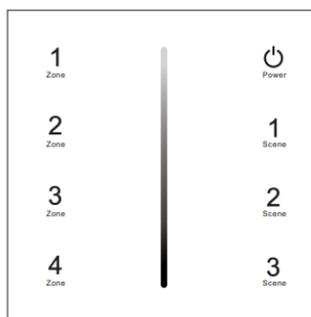

SMART HOME



Safety and EMC:
EMC standard (EMC): EN 301 489, EN 62479
Radio Equipment (RED): EN 300 328
Safety standard (LVD) EN 60950