

BATHROOM LIGHTING

POSEIDON



Technical data

<i>Rated voltage:</i>	230V/ 50-60Hz
<i>Power:</i>	12W; 18W; 24W;
<i>Power supply:</i>	LED driver- mounted in the body
<i>Colour temperature:</i>	4000K;
<i>LED source:</i>	SMD
<i>Colour:</i>	Chromium
<i>Body:</i>	Aluminium alloy
<i>Beam angle:</i>	120°
<i>Colour rendering index:</i>	Ra≥80
<i>Switch on/off:</i>	>50 000
<i>Long life:</i>	30 000h
<i>Protection against dust and moisture:</i>	IP44

Product benefits

- *Installation options: surface ceiling mounting*
- *Low power consumption*
- *Repeated switch-on/off does not affect the lifespan of the luminaire*
- *Instant light with maximum luminous flux*
- *No ultraviolet and infrared rays*
- *Stable and functional light distribution*

Areas of application

- *Bathrooms*
- *Administrative buildings*
- *Places with high level of moisture*


Variants and dimensions

Watt	Whole fixture lumens	Colour temp. (K)	Colour body	Size (mm)			Catalogue number	Packing (pcs)
				Length	Height	Width		
12W	960lm	4000K	Chrome	420	40	60	955POSEIDON12	1
18W	1440lm	4000K	Chrome	655	40	60	955POSEIDON18	1
24W	1920lm	4000K	Chrome	965	40	60	955POSEIDON24	1

Barcodes

3800131199584	955POSEIDON12
3800131199591	955POSEIDON18
3800131199607	955POSEIDON24

Energy efficiency

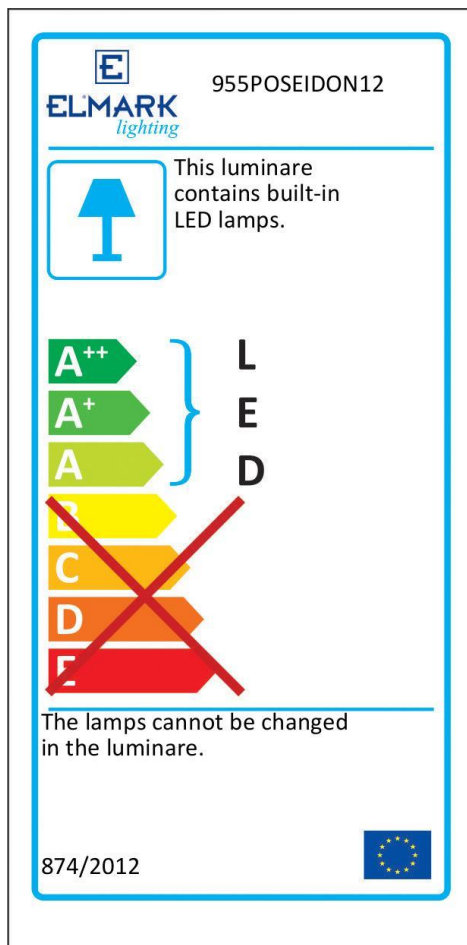

Standards

• EN 55015 • EN 61000-3-2 • EN 61000-3-3 • EN 61547 • EN 60598-1 • EN 60598-2-2 • EN 61347-1 • EN 61347-2-13 • EN 13032-4 •

